**Dati tecnici supporto relay / Technical data relay socket**

Portata / Rating:
12A 250Vac

Materiali / Materials:

Supporti – PA6 + FV autoestinguente / Sockets – self-extinguishing - PA6 + GF

Massima sezione del cavo / Max wire section:

Cavo rigido / Compact wire: $2 \times 2,5 \text{ mm}^2$ (14 AWG)

Cavo flessibile / Flexible wire: $2 \times 2,5 \text{ mm}^2$ (14 AWG)

Cavo con terminale / With cable end: $2 \times 1,5 \text{ mm}^2$ (16 AWG)

Fissaggio supporti / Snap mounting:

Ad aggancio sulla guida EN50022 / On EN50022 rail

Temperatura di impiego / Operating temperature:

-25°C +85°C



dixell S.p.a.

Z.I. Via dell'Industria, 27 - 32010 Pieve d'Alpago (BL) ITALY


tel. +39 - 0437 - 98 33 - fax +39 - 0437 - 98 93 13

<http://www.dixell.com> E-mail: dixell@dixell.com

RT314 KIT

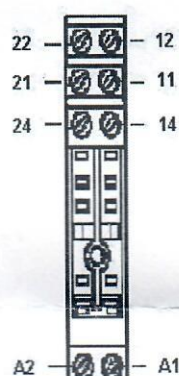

Wiring diagrams
Connessioni

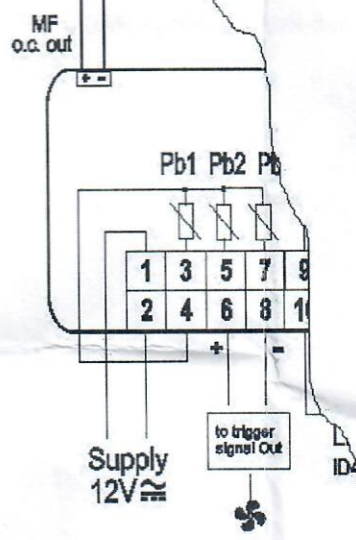

dixell S.p.a.

Z.I. Via dell'Industria, 27 - 32010 Pieve d'Alpago (BL) ITALY
tel. +39 - 0437 - 98 33 - fax +39 - 0437 - 98 93 13
<http://www.dixell.com> E-mail: dixell@dixell.com